
ARTICLE CODE	DESCRIPTION
FPI-8010	Wireless refrigerant scale - job link

BRAND

Fieldpiece Instruments

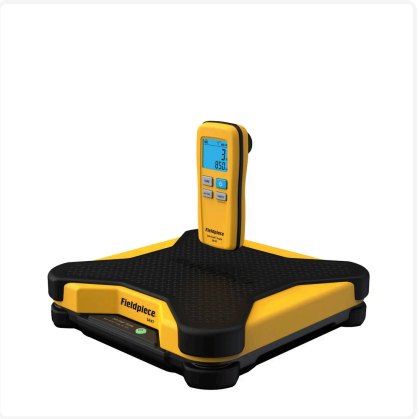

PRODUCT DESCRIPTION

Specifications good in ambient conditions of 73°F ±9°F (23°C ±5°C), <75% relative humidity
Over range: “OL” is displayed
Maximum load: 252 lbs (114 kg)
Auto power off: 30 minutes of inactivity (no change in weight or buttons pressed), (APO can be disabled)
Backlight: Blue, turns off in 120 seconds if no buttons are pressed
Accuracy:
±0.03%rdg + 0.25 oz (10 g), 0 to 66 lbs (0 to 30 kg)
±0.05%rdg + 0.25 oz (10 g), 66 to 252 lbs (30 to 114 kg)
Resolution and Units: lb oz (0.25 oz), lb (0.1 lb), oz (0.1 oz), kg g (10 g), kg (0.1 kg), g (10 g)
Temperature coefficient: 0.1 x (specified accuracy) per °F
Wireless Range: 1000 feet (300 meters)
Radio Frequency: 2400 MHz
Remote Display: 9V, NEDA 1604, JIS 006P, IEC 6F22
Platform: 6 x AA, NEDA 15A, JIS UM3, IEC LR6
Battery Life: is displayed when the battery voltage drops below the operating level
Remote Display: 80 hours typical alkaline (without backlight)
Platform: 200 hours typical alkaline
Operating environment: 32°F to 122°F (0°C to 50°C) at <75% RH
Storage temperature: -4°F to 140°F (-20°C to 60°C), 0 to 80% RH (with battery removed)
Weight: 7 lbs (3.19 kg)

SPECIFICATIONS

Net weight (kg)	6
Color	Undefined

TECHNICAL DETAILS

ETIM	EC000564
MOQ sales (Pc.)	1